


Set Up Your Phoenix FD License

This page provides information on setting up your Phoenix License(s).

Overview

License Server version 5.0 provides licensing of the Chaos Group products without the need for any physical devices to be plugged in your machine. It allows you to easily activate more licenses right after the purchase and provides a way to stay offline while using your products when you need to. It is still compatible with existing USB dongles, in case you need to use your licenses in this way.

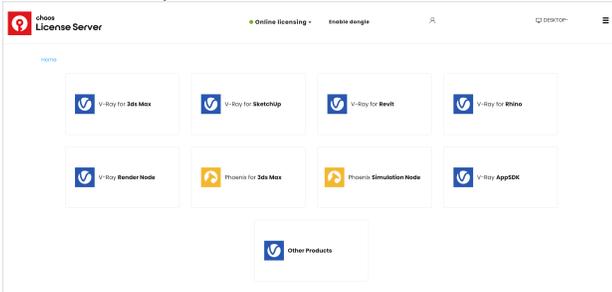

Interface


The License Server's interface is accessible in a web browser. See the [License Server Interface](#) page for more information.

Installation

The installer is fairly straight forward and easy to run, but if you need help, please see the [Installing the License Server](#) page for details on the process. This includes using your Chaos Group account to access your purchased licenses from anywhere online.

Activation

To activate your licenses, go to [127.0.0.1:30304](#) using your web browser and click SIGN IN from the ONLINE LICENSING menu. You will then be prompted to enter your username and password. Once the activation is successful, you will be able to see the list of your available licenses on the License Server home page.

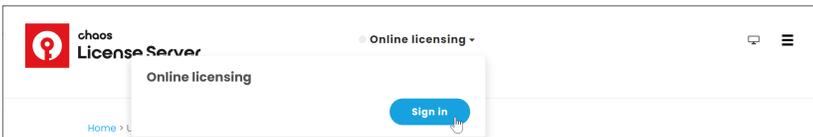

Offline Activation and License Usage - Recommended for Machines Without Internet Access

You can still activate your License Server even without Internet connection. To do this you will need to download an **activation request file** from your License Server. Use another machine with Internet connection to upload the file to [my.chaosgroup.com](#) where you log in with your Chaos Group account and generate an **activation file**. Upload the activation file to your License Server to activate it.

See also the [Borrowing Licenses for Offline Use](#) page for additional information.

- 1) On the machine without Internet connection open the <http://127.0.0.1:30304> page.
- 2) From the expandable menu of **Online licensing**, go to **Offline activation**.

● Or

Online licensing


Connection might be unavailable due to the following reasons:

Proxy settings are configured incorrectly

Firewall blocks license server connections

Internet connection is unavailable

For more information about possible solutions to these issues, please visit the [documentation page](#)



3) Press **Activate offline** button.

Offline ac


[Overview](#)

[Download](#)

Automatic activation requires connection to the Internet, which is currently unavailable. If this is not intended, please check your network settings.

You can still enable online licensing if you have an Internet connection.

Press 'Activate offline' button below to continue.



4) Download your activation request file (cert.crs).


Offline ac

Overview


Download

Download an activation request file (ce

Click here to download an



Press the 'Next' button below to continue



5) Use another machine with Internet connection to log in to my.chaosgroup.com with your Chaos account. Go to Licensing > License Servers and press **A ctivate License Server**.

License servers

You have no License servers activate

Activate License Server

6) Name your license server and press **Next**.


License S

Upload the Activation request file (.csr)

License Server Name

MyLicenseServer|

Click here c



7) Upload the activation request file you downloaded in step 4 and press **Activate**.


License

Upload the Activation request file (.c

License Server Name

MyLicenseServer|

Click he

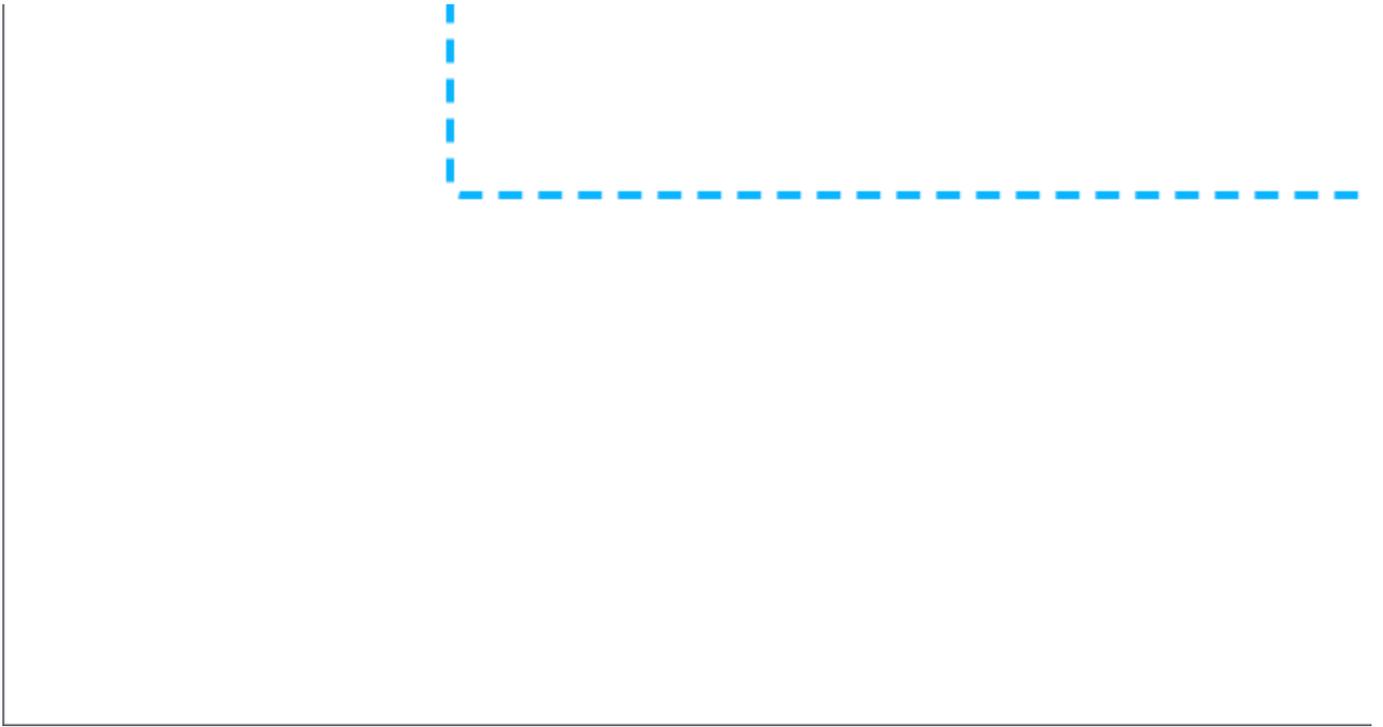

8) Download your **Activation file** (cert.crt).

License S

Upload the Activation request file (.csr) th

License Server Name

MyLicenseServer

Click here or



9) On the machine without Internet connection in your <http://127.0.0.1:30304> page upload your **Activation file** (cert.crt) and press **Upload**.

Offline

Overview

Download


Provide the activation certificate file

[Click here or download](#)

Activation

Press 'Upload' button

Press the 'Upload' button below to complete



10) Your site is now successfully activated.

Offline ac

Overview

Download

Site successful





Got

USB Dongle usage

The Licensing system allows you to use seats associated with your Chaos Group account easily from anywhere you can log into over the internet. If you also have a USB dongle with Chaos product licenses attached to your computer, you can utilize those available licenses with the License Server. For more details on this process, please see the [Dongle usage](#) page.

When using a dongle license connected to the License Server you are only able to access the dongle licenses on the machine that the dongle is connected to. You are unable to access dongle licenses over the internet on another machine logged into the License Server.

Settings

In most situations, adjusting the Settings for the online licensing system is not necessary. But if you need to adjust something like your connection settings because you're using a Proxy server, you can get to these through the drop-down menu in the top right corner of the License Server webpage and choosing Settings. For more details on what settings are adjustable from this area, please see the [Advanced Settings](#) page.

Updating from License Server 3.0 to 5.0

If you are updating your licensing system from the previous setup to the new online system, no changes are required on the workstation or application side of your software. The online system replaces the existing dongle functionality without any additional steps needed on your part. There is no need to use the Change License Settings application to reconfigure your setup. If you have purchased online licenses, these can be activated for online usage in the new system right away.

The username and password credentials in the Change your license settings tool window are **not** the same as your online credentials used to log into your account at my.chaosgroup.com and activate version 5.0 of the License Server.

V-Ray license server information

Primary license server:	Alternate license server 1:
License server: localhost	License server:
Connection port: 30304	Connection port: 30304
Online authorization settings:	Alternate license server 2:
User name: user_name	License server:
Password:	Connection port:

OK Cancel

Username

Use

Password

.....

F

